

Image Cover Sheet

CLASSIFICATION

UNCLASSIFIED

SYSTEM NUMBER

509064



TITLE

MODELLING AND REFINING STRUCTURAL DETAIL IN A MAESTRO MODEL FOR A BOTTOM-UP OR
TOP-DOWN ANALYSIS USING THE PC VERSION OF MAESTRO/DSA

System Number:

Patron Number:

Requester:

Notes:

DSIS Use only:

Deliver to:



National Defence
Research and
Development Branch

Défense nationale
Bureau de recherche
et développement

DREA CR/98/402

**MODELLING AND REFINING
STRUCTURAL DETAIL IN A MAESTRO
MODEL FOR A BOTTOM-UP OR
TOP-DOWN ANALYSIS USING THE
PC VERSION OF MAESTRO/DSA**

by

D.R. Smith

D.R. Smith

Suite 707, 5959 Spring Garden Road

Halifax, Nova Scotia, Canada

CONTRACTOR REPORT

Prepared for .

**Defence
Research
Establishment
Atlantic**



**Centre de
Recherches pour la
Défense
Atlantique**

Canada

THIS IS AN UNEDITED REPORT ON SCIENTIFIC OR TECHNICAL WORK
CONTRACTED BY THE DEFENCE RESEARCH ESTABLISHMENT ATLANTIC
OF THE RESEARCH AND DEVELOPMENT BRANCH OF THE DEPARTMENT
OF NATIONAL DEFENCE, CANADA.

THE CONTENTS OF THE REPORT ARE THE RESPONSIBILITY OF THE
CONTRACTOR, AND DO NOT NECESSARILY REFLECT THE OFFICIAL
POLICIES OF THE DEPARTMENT OF NATIONAL DEFENCE.

PLEASE DIRECT ENQUIRIES TO:

THE DIRECTOR GENERAL
DEFENCE RESEARCH ESTABLISHMENT ATLANTIC
P.O. BOX 1012
DARTMOUTH, NOVA SCOTIA, CANADA
B2Y 3Z7



National Defence
Research and
Development Branch

Défense nationale
Bureau de recherche
et développement

DREA CR/98/402

**MODELLING AND REFINING
STRUCTURAL DETAIL IN A MAESTRO
MODEL FOR A BOTTOM-UP OR
TOP-DOWN ANALYSIS USING THE
PC VERSION OF MAESTRO/DSA**

by

D.R. Smith

D.R. Smith

Suite 707, 5959 Spring Garden Road

Halifax, Nova Scotia, Canada

Accepted by :

Layton Gilroy

Contract Scientific Authority

October 1997

W7707-6-3561

Contract Number

CONTRACTOR REPORT

**Defence
Research
Establishment
Atlantic**



**Centre de
Recherches pour la
Défense
Atlantique**

Canada

Abstract

The report describes the process for modelling and refining structural detail of a ship, for which a MAESTRO model has been created, in preparation for a bottom-up or a top-down detail stress analysis. The detail can be modelled by either locally refining the MAESTRO model, using the program MAESTRO/DSA, or by creating the model separately with a mesh generator such as HYPERMESH. The processing of the results to display them in graphic form suitable for the documentation program \LaTeX is also illustrated.

Résumé

Le présent rapport décrit le processus de modélisation et d'affinage du détail structural d'un navire pour lequel un modèle MAESTRO a été créé, en vue de préparer une analyse ascendante ou descendante des contraintes de détail. Le détail peut être modélisé localement par affinage du modèle MAESTRO, en utilisant le modèle MAESTRO/DSA ou en créant le modèle sparment avec un générateur de maillage comme HYPERMESH. Le traitement des résultats en vue de leur affichage sous une forme graphique compatible avec le programme de documentation \LaTeX est également illustré.

Contents

Abstract	ii
Table of Contents	iii
List of Figures	iv
1 Introduction	1
2 Bottom-up Procedure Using an Externally Generated Model	1
2.1 MAESTRO Graphics Mode to Localize the Area to be Detailed	2
2.2 Detail Stress Analysis Mode	3
2.3 Generating Master Nodes and Slave Nodes at the Interface	5
2.4 Creating a Detail Stress Analysis DSA File	6
2.5 Running the DSA Analysis	6
3 Top-down Procedure Using an Externally Generated Model	6
4 Generating a Refined Model in the MAESTRO Model	7
4.1 Refining MAESTRO Elements in the MAESTRO Model	7
4.2 Using the Mesh Option	8
5 Hardcopying the Screen Graphics	10
5.1 Previewing Hardcopy Files	11
5.2 View Orientation	11
5.3 Transferring a Graphics File from the Laptop to a Silicon Graphics System	12
5.4 Preparing DSA Generated Graphics Files for L ^A T _E X Processing	13
6 Comments	14
References	33
Appendices	34
7 Laptop Specification	34
8 DSA File	35
9 MAESTRO.DAT File	38

List of Figures

1	Wire Drawing of MAESTRO Ship Model	15
2	Panel Fill Plot of the Model	16
3	The Portion of the MAESTRO Model to be Deleted	17
4	The Externally Generated Detail Model Displayed for Inspection	18
5	The Detail Model Inserted Into the MAESTRO Model	19
6	Master and Slave Nodes Applied to the Detail Model	20
7	An Example of Refinement of the Local Structure of a Ship	21
8	A Model of a Large Deck Opening Extracted from the MAESTRO Model	22
9	The Refinement of the Deck Region of the Large Opening	23
10	Refinement of the Bulkheads of the Model of the Large Opening	24
11	An Enlarged View of the Corner of the Large Opening with the Corner Plate and Beam Removed	25
12	The Chord Option Curve Drawn Through the Chosen Points	26
13	The Meshed Triangle in the Corner of the Large Opening	27
14	An Enlarged View of the Meshed Triangle	28
15	The Curved Collar Attached to the Meshed Triangle	29
16	The Curved Collar with Straight Portions Attached	30
17	Element Stresses Plotted After Latex Processing without the use of the Special Feature	31
18	Element Stresses Plotted After Latex Processing with the Use of the Special Feature	32

1 Introduction

The computer code MAESTRO[1] has been developed for the finite element analysis of the global structural behaviour of ship hulls. When used for such an analysis, details such as stress concentrations around openings and other geometries which require fine grids cannot be assessed. MAESTRO can, however, provide boundary conditions for fine mesh models of structural details generated for a general purpose finite element code. There are two types of detail analyses that can be performed in conjunction with a MAESTRO global analysis to obtain detail stresses at various locations of a ship structure. One method is top-down analysis where a MAESTRO global analysis of a ship structure is carried out and then a detail of the ship structure is refined using the program MAESTRO/DSA[2]. An option to this method is to generate an external finite element model of the detail as a VAST[3] geometry file, using a mesh generator such as HYPERMESH[4] and read it in through MAESTRO/DSA and append it to the MAESTRO ship model. In the case where an externally generated model is used the MAESTRO elements it replaces must be deleted first.

The second method is the bottom-up or superelement method. This procedure can achieve the same purpose as top-down by two processes. One is to refine the detail area in place on the MAESTRO model, in which case a superelement is created automatically and is inserted into the MAESTRO model equilibrium equations in the form of statically condensed stiffness matrices. The second process involves the removal of the portion of the MAESTRO model which is replaced with an externally generated detail model of the portion removed. The externally generated detail is treated as a superelement in the same manner as the internally generated detail model.

In both the top-down and bottom-up methods the Master and Slave nodes are identified to account for incompatibility at the boundaries. The type of analysis to be carried out, either top-down or bottom-up, is chosen and the DSA (Detail Stress Analysis) file is created. The file is then used by MAESTRO in conjunction with VAST to obtain the stresses in the detail structure.

This report describes the procedure followed in producing a DSA file for a bottom-up and a top-down analysis using a laptop computer. The processing of results to display them in graphic form suitable for a document preparation system, such as L^AT_EX[5], is also described as well as the process of transferring graphic files to a Silicon Graphics workstation for enhanced display of the models and the analytical results.

2 Bottom-up Procedure Using an Externally Generated Model

An external model was created using the mesh generating program HYPERMESH. With the model created the following procedure is used to merge the detail model with the MAESTRO model and produce a DSA file.

With Windows 95[6] loaded on the laptop PC.:

Click On: START

Click On: PROGRAMS

Click On: MS-DOS Prompt

To load the program MAESTRO/DSA, connect to its folder directory

```
cd \maestrod\v71aug26
```

The run command is RUNMG

2.1 MAESTRO Graphics Mode to Localize the Area to be Detailed

The following is the procedure for removing a portion of a MAESTRO model in preparation for adding an externally generated detailed model of the portion removed. The program is run in the MAESTRO Graphics mode to proceed. This can be confirmed by checking the lower right hand area of the screen where MG> MODE = Menu should be displayed. If it is not, a Click on the alternative display DSA> MODE = MENU will restore it.

Click On: FILE

Enter MAESTRO Job Name, in this case CPF71

Click On: OK

Click On: NO to ARE PLC/PLE/PLN FILES Available?

The model is automatically plotted as a wire model as shown in Figure 1

Click On: PLOT

Click On: PLOT FILL HIDE to plot as a panel fill model.

The panel fill model is shown in Figure 2

Remove the superstructure to expose the area where structure is to be refined.

Click On: Erase/Restore

Click On: SUBSTRUCTURE/MODULE

Click On: OK to table

Click On: 3 then OK in this case to remove superstructure

Click On: PLOT then FILL HIDE

Click On: Choose -Y axis at bottom of screen

Click On: Erase/Restore then BOX cursor OK

Window the portion of the hull in which detail is to be inserted by creating a four point box around it.

Click On: -Z view

Click On: OK in BOX Menu

Window the portion of the deck and bulkheads to be retained for eventual deletion by forming a four point box around it. Use as many boxes as required by clicking on OK for each box

Click On: View V1 for an oblique view

Click On: -RH to rotate about horizontal axis as required to expose structure to be deleted.

Click On: Cancel to bring up Erase/Restore

Click On: CURSOR

Indicate the individual MAESTRO elements to be removed by locating their centroids with the cursor. The portion of the MAESTRO model to be deleted is shown in Figure 3.

After the model to be deleted has been identified as the remaining structure switch to DSA mode.

Click On: MG> MODE=MENU to obtain DSA> MODE=MENU

2.2 Detail Stress Analysis Mode

The deletion of the portion of the structure, to be replaced by the externally generated detail, is carried out as follows.

Click On: Generate/Modify, then ELEMENTS, then DELETE, to remove the portion of the deck, identified in the previous procedure, by windowing the whole of the remaining MAESTRO structure with a box of four points located with the cursor.

Click On: Single to bring up box then OK

Click On: OK to accept Inside. Then encompass the structure to be deleted with the four point box.

Click On: YES to proceed with BOX OPERATION

Click On: OPTIONS then DISPLAY

Click On: DELETE displays the structure deleted

To restore the complete MAESTRO model, proceed as follows.

Click On: DSA/MODE=MENU to bring MG/MODE=MENU

Click On: Erase/Restore then INITIALIZE

Click On: Fill to display MAESTRO model.

Click On: MG/MODE=MENU

Click On: Options, then DISPLAY then UNDELETE to display undeleted portion of the MAESTRO model

Click On: DELETE to display deleted portion.

Read in the externally generated detail model.

Click On: FILES

Click On: DSA and enter externally created model file name.

Click On: READ

Click On: GEOMETRY and ELEMENT File

Enter the file name (in this, case BIGMF) which is the VAST geometry file for the detail structure that has been created externally.

Click On: NO to append to existing model.

The detail model is displayed for inspection as shown in Figure 4 with the axes properly oriented (although it is initially plotted inverted).

To append the model to the full structure, proceed as follows:

Click On: FILES

Click On: DSA

Click On: READ

Click On: GEOMETRY and ELEMENT File

Click On: YES to append to existing model.

The detail model is displayed inserted into the MAESTRO model, in place of the deleted structure, as shown in Figure 5.

Restore the entire structure in preparation for the generation of master nodes and slave nodes.

Click On: DSA> MODE=MENU to obtain MG> MODE=MENU

Click On: Erase/Restore

Click On: SUBSTRUCTURE/MODULE

Click On: 3 then OK to restore superstructure

Click On: MG> MODE=MENU to obtain DSA> MODE=MENU

2.3 Generating Master Nodes and Slave Nodes at the Interface

The master and slave nodes required for the boundary conditions are generated as follows:

Click On: Erase/Restore

Click On: MAESTRO

Click On: ERASE to remove MAESTRO model to leave only the refined detail model.

Click On: Generate/Modify then NODES

Click On: MASTER

Click On: use COINCIDENT MAESTRO NODES YES

The tolerance for the location of coincident master nodes is requested. The selection of the tolerance is important as too fine a tolerance, especially for externally generated detail, may result in some coincident nodes being missed. After the master nodes have been identified then proceed with slave nodes.

Click On: SLAVE, Line, then OK

Figure 6 shows the master and slave nodes located on the detail model.

2.4 Creating a Detail Stress Analysis DSA File

After slave nodes have been identified, return to screen display.

Click On: INTERFACE

Click On: MAESTRO/DSA

Click On: SUPERELEMENT ANALYSIS

Click On: CREATE DSA Files

Click On: FILES

Click On: EXIT

2.5 Running the DSA Analysis

The DSA file for the analysis has been created and MAESTRO can be run with the option to carry out a detailed stress analysis selected. The command to run the analysis are:

Click On: START then PROGRAMS

Click On: MS DOS Prompts

Connect to the MAESTRO/DSA file

```
c:\Windows>cd \maestrod\v71aug26
```

```
c:\maestrod\v71aug26>maestro cpf71/dsa
```

The MAESTRO analysis automatically runs with the superelement in place and the displacements required for the designated master nodes are generated. The detail stress analysis portion of the run begins on the completion of the MAESTRO run. The progress of the stages of the analysis is displayed on the screen.

3 Top-down Procedure Using an Externally Generated Model

The top-down procedure when using an externally generated detail model is essentially the same procedure as for bottom-up. Starting initially in the MG/MODE, the region in the MAESTRO model to be replaced is isolated using the Ersae/Restore option. The mode is then switched to the DSA/MODE and the region is deleted by using Generate/Modify as in the bottom-up procedure. The DSA file is created in the same way as for bottom-up, as described in subsection 2.4, except that TOP-DOWN ANALYSIS is chosen in place of SUPERELEMENT ANALYSIS. The procedure for running the analysis is identical to that described for bottom-up in subsection 2.5.

4 Generating a Refined Model in the MAESTRO Model

The analysis of the stresses in a hull detail is most often accomplished by refining the local detail in place with DSA. It is carried out as follows.

4.1 Refining MAESTRO Elements in the MAESTRO Model

Click On: File and enter the MAESTRO file name e.g. cpf71

It may be desirable to chose No to ' ARE PLC/PLE/PLN FILES' Available in order to renumber the NODES which may be required if previous operations have been carried out. In any case a wire plot will be displayed to confirm the presence of the model.

Click On: DSA mode

Click On: Erase/Restore to define region to be refined.

Click On: Box then OK to Cursor and separate out the region

Click On: On/Off then switch ON Stiffener Display

Click On: Fill to display model with stiffeners.

Click On: Generate/Modify

Click On: Refine

If beams are present the general 3D beam element is the simplest to apply. The plated beams often require considerable planning at beam to beam intersections. The process for refining the general beam elements is as follows.

Click On: Element

Click On: Line to refine beams.

Click On: MAESTRO beam with cursor and accept or change the number of beams

Click On: Cancel to return to elements.

Click On: Stiffened Panel. The number in the first line defaults to 2 elements between stiffeners, the second line defaults to 5 elements accross.

Click On: The MAESTRO elements to be refined.

Click On: The space to the right of the plot to return to the menu.

An example of refinement of the local structure of a ship structure is shown in Figure 7.

Click On: Cancel

Click On: Nodes

Click On: Master nodes

After defining master nodes, then

Click On: Slave nodes

After defining Master and Slave nodes, equivalence and compress the elements by

Click On: Regular nodes

Click On: Equivalence

Click On: Compress

Click On: Interface

Click On: MAESTRO/DSA

Click On: Either TOP DOWN Analysis or SUPERELEMENT analysis

Enter DSA file name

Click On: Files

Click On: Exit

4.2 Using the Mesh Option

When refining a detail on a MAESTRO ship model it is often found that the MAESTRO element geometry is too crude to properly represent the detail required to model the stress field present on the ship. In such a situation, refining alone will not be sufficient. Such a case is shown in Figure 8, which is a large opening in the ship deck extracted from the MAESTRO model. The corners of the opening are approximated by triangular MAESTRO elements, when in fact they are made up of radii with a coaming. In this case, the majority of the model is refined using REFINE from the menu activated by clicking on Generate/Modify. The refinement of the deck region of the large opening is shown in Figure 9, using stiffened plates with the corner plates untouched. The refinement of the bulkheads of the large opening is shown in Figure 10. The beams are refined as regular beams using line elements. The corners are refined using the MESH option.

In preparation for meshing, a properties file had to be created as the meshed elements are new elements and do not use the MAESTRO element data. The properties file was created as follows:

Click On: Files

Click On: PROPERTY

Select: New

Enter: Property file name

Click On: OK

Click On: Generate/Modify

Click On: PROPERTIES

Click On: UNITS

Click On: MATERIAL and enter the required properties.

Click On: PLATE and enter the required properties.

Click On: STIFFENER and enter the required properties. Repeat as many times as there are different stiffeners.

Click On: BEAMS if defined by crosssection dimensions.

Click On: SECTION if the beams are to defined with section properties

The return to the Generate/Modify menu is achieved by canceling the displayed menus until the main Generate/Modify menu is displayed. Prior to meshing, reference was made to pages 35 and 44 of VAST GRAPHICS SYSTEM user manual[7].

Click On: Delete then Cursor then the MAESTRO elements in the corner to be deleted.

An enlarged view of the corner of the large opening with the MAESTRO corner fillet element and beams removed is shown in Figure 11.

Click On: MESH

Click On: PLATE then Click on plate type until the Triangular Plate is obtained. Select meshing proportions consistent with adjacent elements, in this case 6 3 4 for 3 nodes along one side and 4 along the other and 6 along the hypotenuse. Change straight to radius.

Click On: the element nodes locating the hypotenuse by first starting with the side with 4 elements. Then locate the third node as the orientation point.

Click On: the Radius of the RADIUS OPTION window and enter the radius required. The Chord option draws a curve through the chosen points, as shown in Figure 12, while the Tangent option may not.

Click On: OK unless biasing of the nodes is required.

A gridded triangle is formed which can be accepted or rejected. If accepted the meshed triangle is drawn as shown in Figure 13. An enlarged view of the mesh is shown in Figure 14. Frequently in the case where a tangent radius is chosen the triangular plate nodes do not exactly match the adjacent plate nodes. This can be corrected by selecting NODES from the main GENERATE/MODIFY menu and then REGULAR followed by EQUIVALENCE. The node to be moved is clicked on first followed by the node it is to be matched with.

The next step, if a compound radius is required, would be to add two curved triangular elements to represent the radii at the corner. In this case a single radius is used and a collar representing the coaming around the opening is created. The collar is located in the MESH menu of GENERATE/MODIFY. The collar is formed with two elements whose height dimensions WT and WB as shown in Figure 14.8-2 of Reference 6. The default grid is defined by Netel in the element form display eg: 5 2 2 which indicates 5 elements along the length 2 above and 2 below the deck. This is changed in this case to 6 1 1 to suit the surrounding plate mesh. The collar thickness is defined by the plate property number. The ends of the collar are located with the cursor, as is the third point which is the orientation point as shown in the referenced figure. If a curved collar is required, then the FORM must be changed to Radius and a value entered after clicking on OK. A curve will be drawn for inspection which can be accepted. If rejected another radius can be tried. When accepted the gridded collar is drawn and any mismatch of the nodes with the adjacent plate can be corrected by using the equivalencing option. The curved collar is shown attached to the fillet in Figure 15. The addition of straight portions is shown in Figure 16. The attachment of straight portions to the curved portion is much more difficult to achieve when the Tangent radius option is used.

5 Hardcopying the Screen Graphics

A hard copy can be made of any of the screen displays by clicking on H/C on the top the screen buttons. A Postscript file will be created after entering the file name at the prompt at the bottom of the screen. The file name must contain the suffix .eps so that it will be compatible with the screen previewing program Ghostscript[8], and the Silicon Graphics workstations should the file be transferred there.

5.1 Previewing Hardcopy Files

The hardcopy in the form of a Postscript file can be previewed before printing by exiting MAESTRO/DSA and continuing as follows;

Click On: START

Click On: Programs

Click On: GS Tools

Click On: GSview 32

Click On: FILE button

Click On: Open

Double Click On: desired .eps (encapsulated Postscript) graphics file to preview the file.

Click On: FILE then select File to view another file or Exit to end previewing.

5.2 View Orientation

The orientation of the preview graphics is controlled by the graphics driver located in folder gssgks as cgi.cfg. The orientation is normally landscape which can be changed to portrait by editing cgi.cfg using the VI editor in Windows 95.

Click On: START

Click On: PROGRAM to MS-DOS Prompts

Enter the following commands after the Windows prompt indicating the C drive is in use. The subdirectory is drivers and the file name of the postscript control program is cgi.cfg.

```
C:\WINDOWS>cd\gssgks\drivers
```

Check for the existence of the file

```
C:\gssgks\drivers>dir *.cfg
```

To edit with VI

```
C:\gssgks\drivers>vi cgi.cfg
```

The orientation can be changed to either portrait or landscape.

CTRL Z ends the editing

5.3 Transferring a Graphics File from the Laptop to a Silicon Graphics System

After a hardcopy of a graphics file has been created it can be transferred to a Silicon Graphics workstation as a .eps(encapsulated Postscript)file for further viewing and or processing by a document preparation system such as L^AT_EX. The method for transferring the file is as follows.

Click On: START then PROGRAMS

Click On: MS-DOS Prompt

Go to windows for file transfer protocol.

```
C:Windows>ftp.exe
```

```
ftp>open
```

```
(to)palantir (the name of the Silcon Graphics station)
```

```
User(_____)smith
```

```
Password:
```

Connect to laptop folder containing the eps file

```
ftp>lcd c:\maestrod\v71aug26
```

Switch to binary to transfer files

```
ftp>binary
```

Connect to Silcon Graphics directory

```
ftp>cd /remote/greatwhite/big1/hydro/smith/models
```

Place file in directory

```
ftp> put don1.eps
```

5.4 Preparing DSA Generated Graphics Files for L^AT_EX Processing

A hardcopy file generated by MAESTRO/DSA is in Postscript format. It can be previewed on the Silicon Graphics workstation for confirmation after transferring from a PC computer. If it was generated using portrait as the orientation, the picture will appear distorted when viewed because the aspect ratio is incorrect. This distortion can be corrected in the L^AT_EX specification for the figure with a special statement found on page 6 of the DVIPS: A TEX Driver.

```
\special{psfile=filename.ps[key=value]}
```

key options are:

hoffset = The horizontal offset(default 0)

voffset = The vertical offset(default 0)

hsize = The horizontal clipping size(default 612)

vsize = The vertical clipping size(default)

hscale = The horizontal scaling factor(default 100)

vscale = The vertical scaling factor(default 100)

angle = The rotation(default)

clip = Enable clipping to the bounding box

An example of the use of the special feature is shown in the following L^AT_EX figure specification.

```
\begin{figure}
\special{psfile=stress1.eps hoffset=-50 voffset=-500 hscale=90 vscale=60}
\vspace{7.0in}
\caption{ }
\label{f9}
\end{figure}
```

An example of the element stresses plotted with and without the use of the special statement is shown in the following figures, where Figure 17 shows the graphics without the use of the special feature and Figure 18 shows the graphics with its use.

6 Comments

The Laptop version of MAESTRO/DSA is shown to be capable of refining structural detail in a MAESTRO model to obtain the detail stresses at a local area of a global model. The two methods of modeling the detail are demonstrated. One is by refinement using the capabilities within the program and the other is by generating a refined model externally. Both methods of modelling the detail work satisfactorily, as do the element and node creation routines. The top-down analysis works very well, however, the bottom-up analysis gives unreliable results, the reason for which has not been determined.

Other problems encountered with the program were as follows;

(a)Externally Generated Model: The externally generated model, when initially read into MAESTRO/DSA, is plotted inverted when not appended to the MAESTRO model.

(b)Meshing: To fit elements to a fillet radius, such as found in a deck opening, is an important requirement. A radius can be guaranteed to fit between the selected nodes without equivalencing the nodes of the adjacent elements with the use of the cursor if the Chord option is used when defining the radius. This is seldom the case if the Tangent option is chosen. The same applies when fitting a collar element to represent the coaming along the fillet radius.

(c)Hardcopy: This option can not produce a portrait view of the screen image without distortion. It requires the use of a special \LaTeX feature to produce suitable report quality figures. The hard copy of the screen image showing fringe plots of the stresses did not remove all of redundant background, although it did so when copying an element stress plot. The hard copy of the beam stresses did not respond to the strut width setting. The option to plot beams failed to reproduce the beams as displayed in the screen image because they were plotted first and were then obscured by the elements which were plotted last. The master and slave nodes, although they appeared on the screen image, were not plotted on the hardcopy of the image.

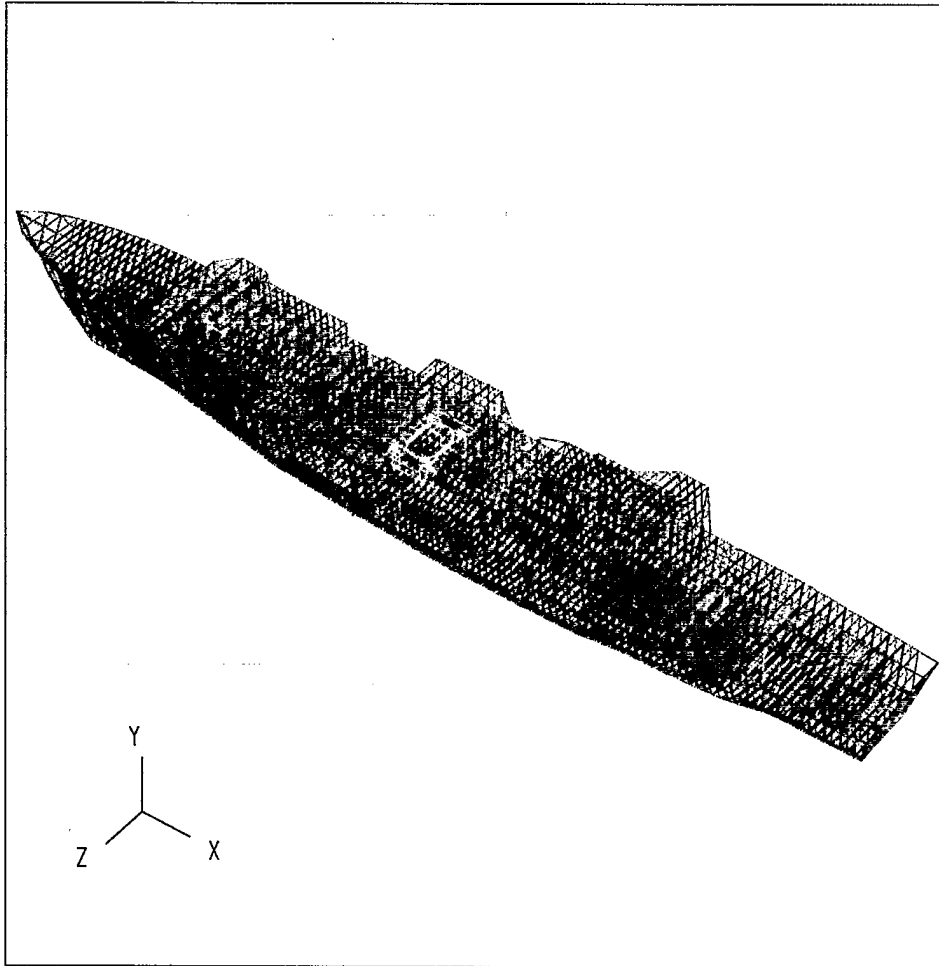


Figure 1: Wire Drawing of MAESTRO Ship model

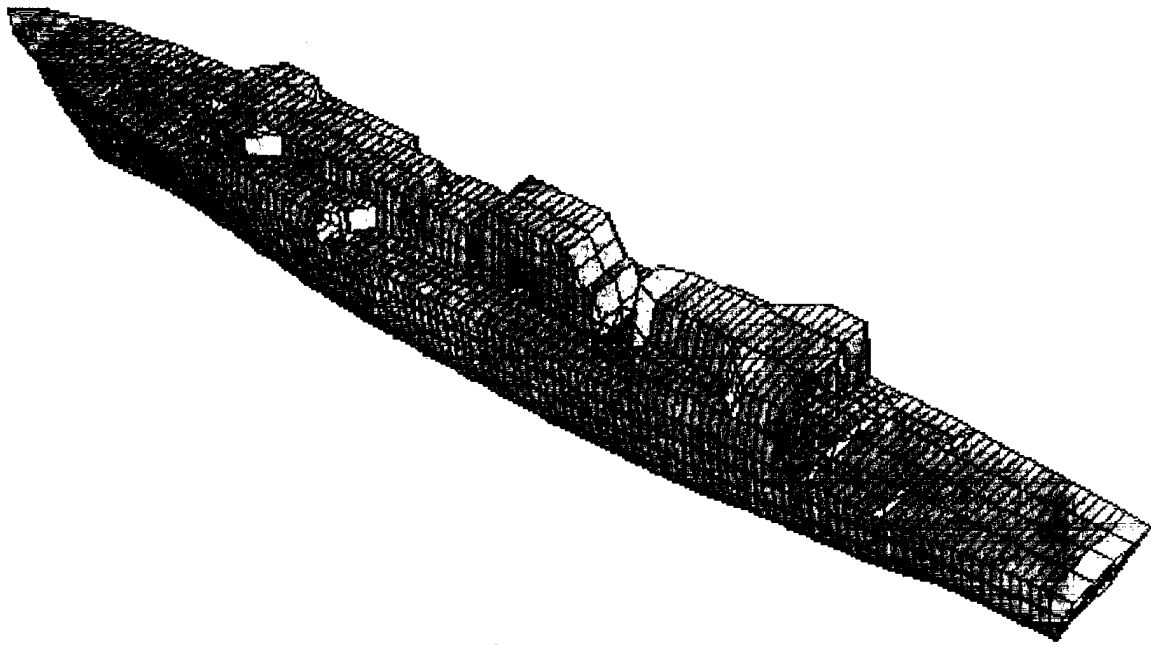


Figure 2: Panel Fill Plot of the Model

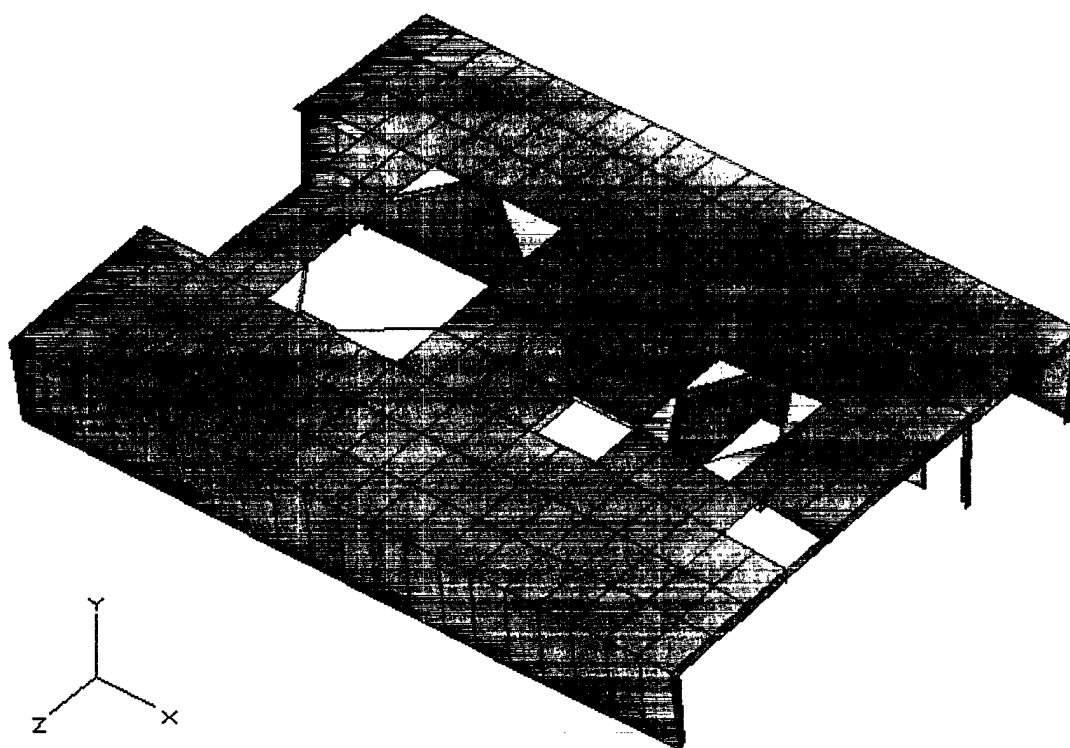


Figure 3: The Portion of the MAESTRO Model to be Deleted

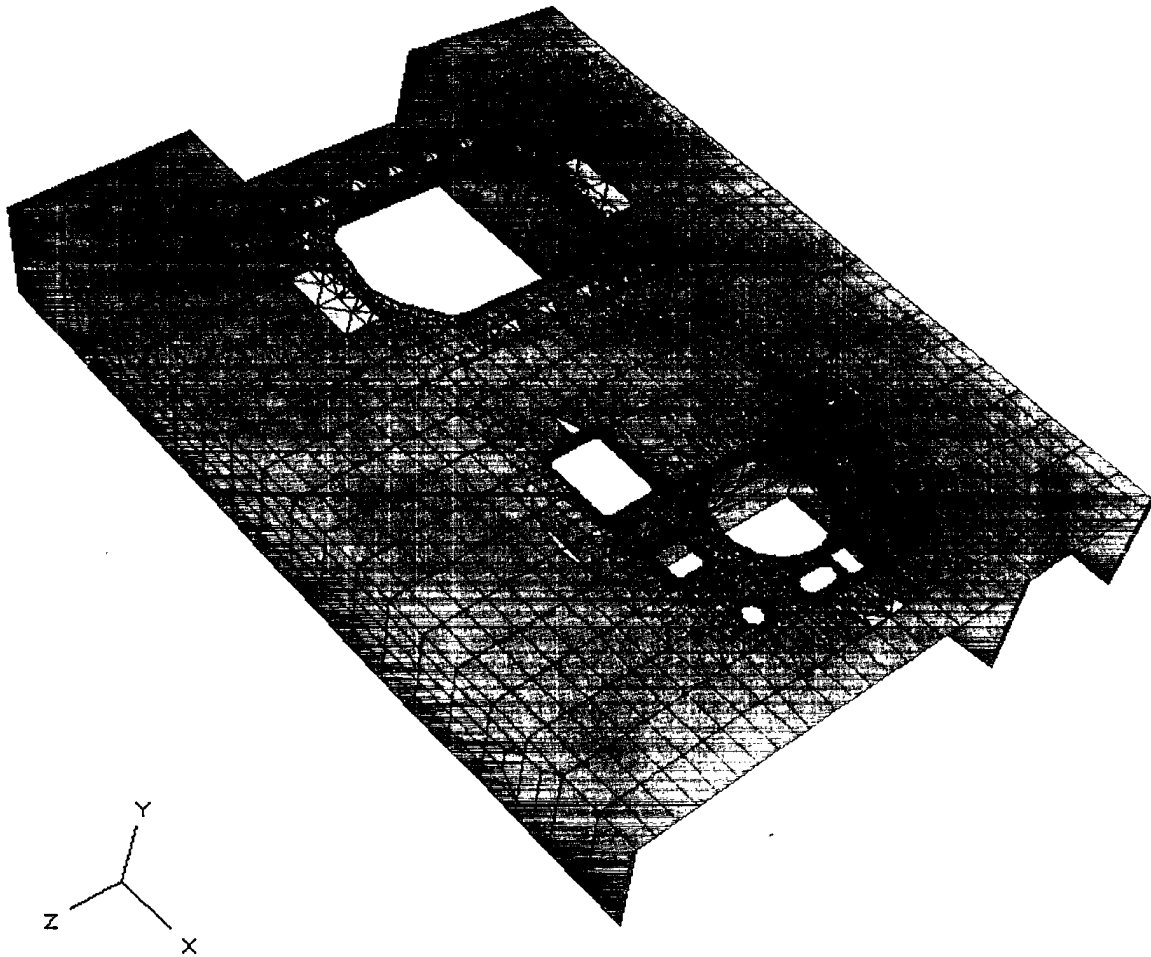


Figure 4: The Externally Generated Detail Model Displayed for Inspection

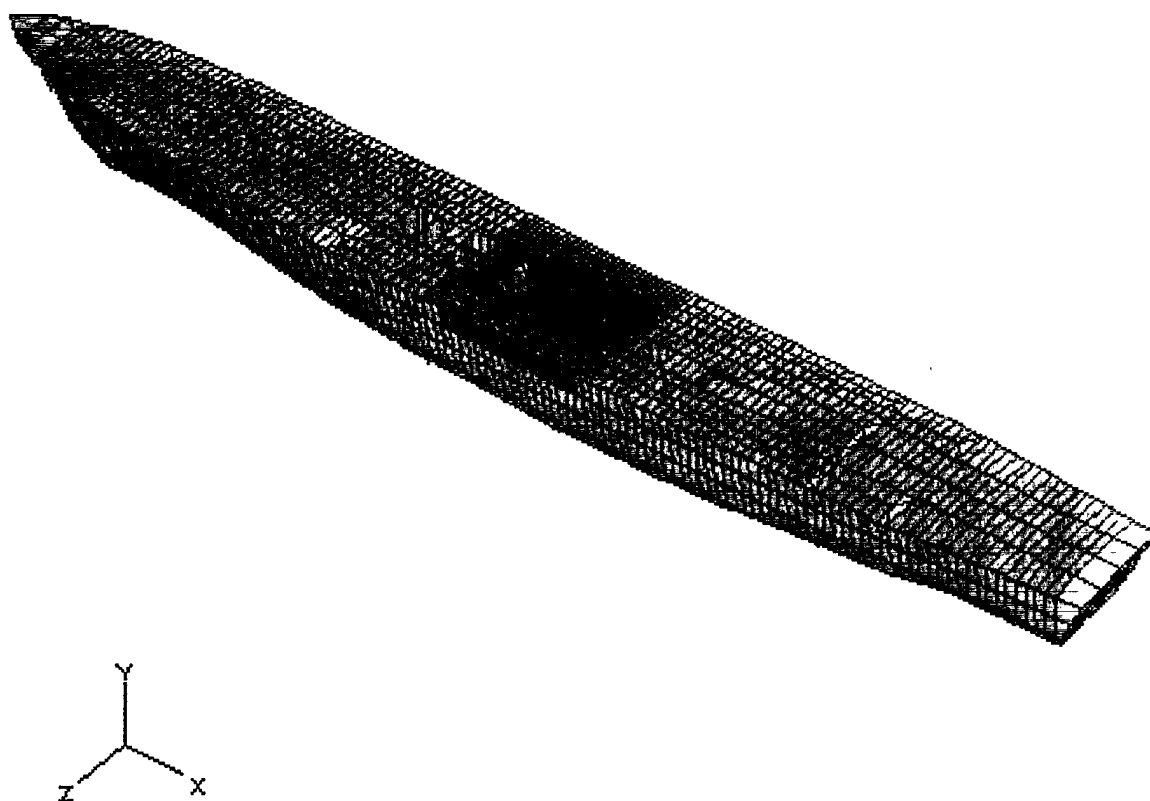


Figure 5: The Detail Model Inserted Into the MAESTRO Model

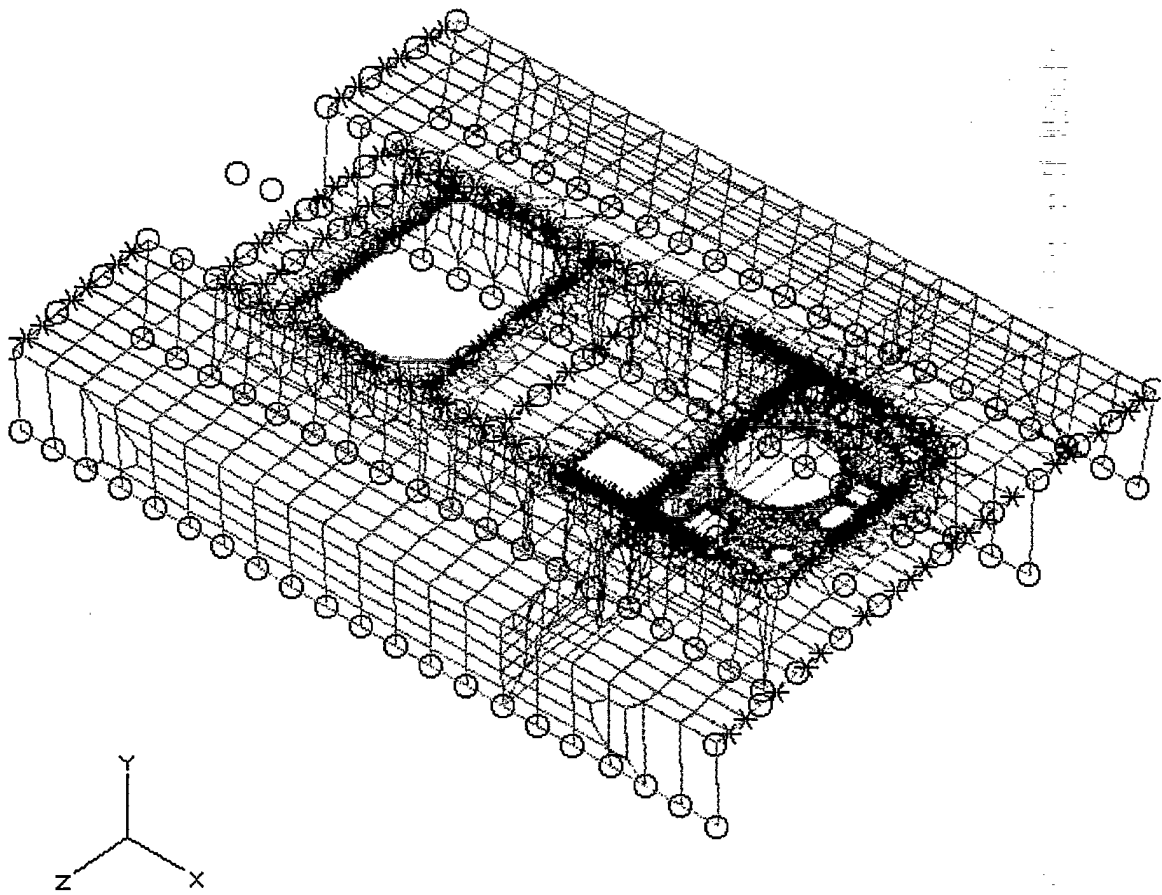


Figure 6: Master and Slave Nodes Applied to the Detail Model

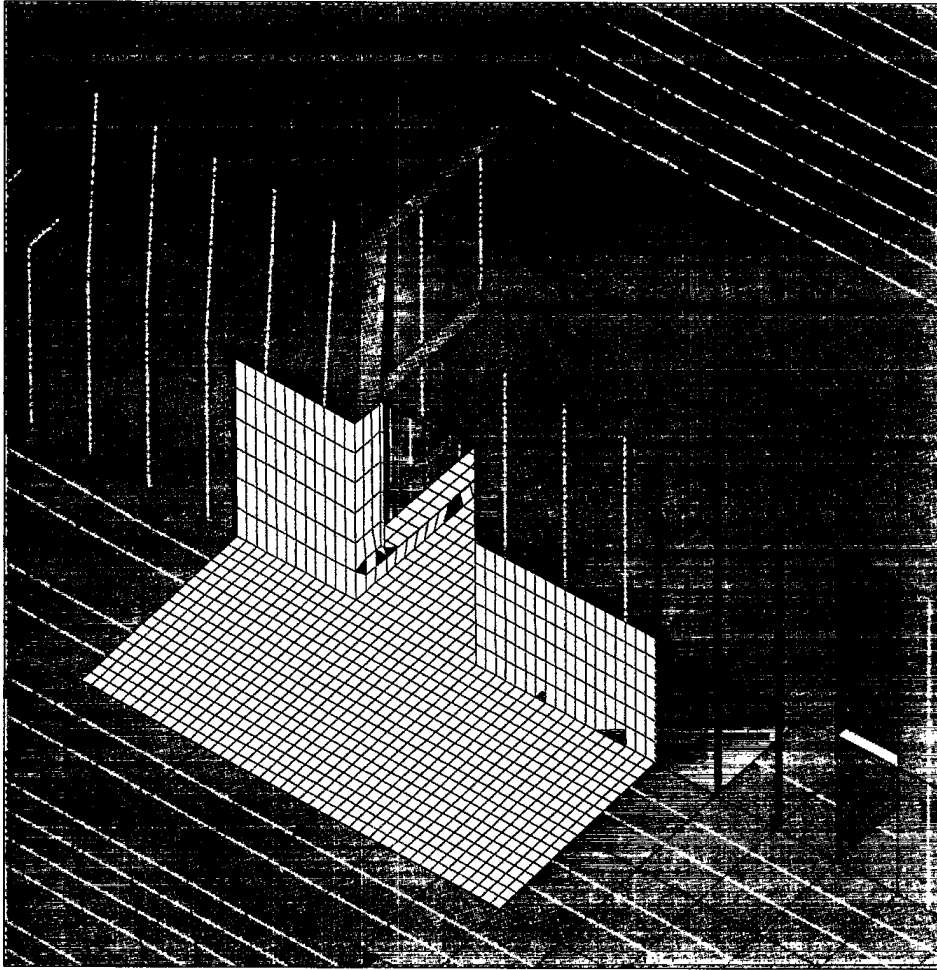


Figure 7: An Example of Refinement of the Local Structure of a Ship

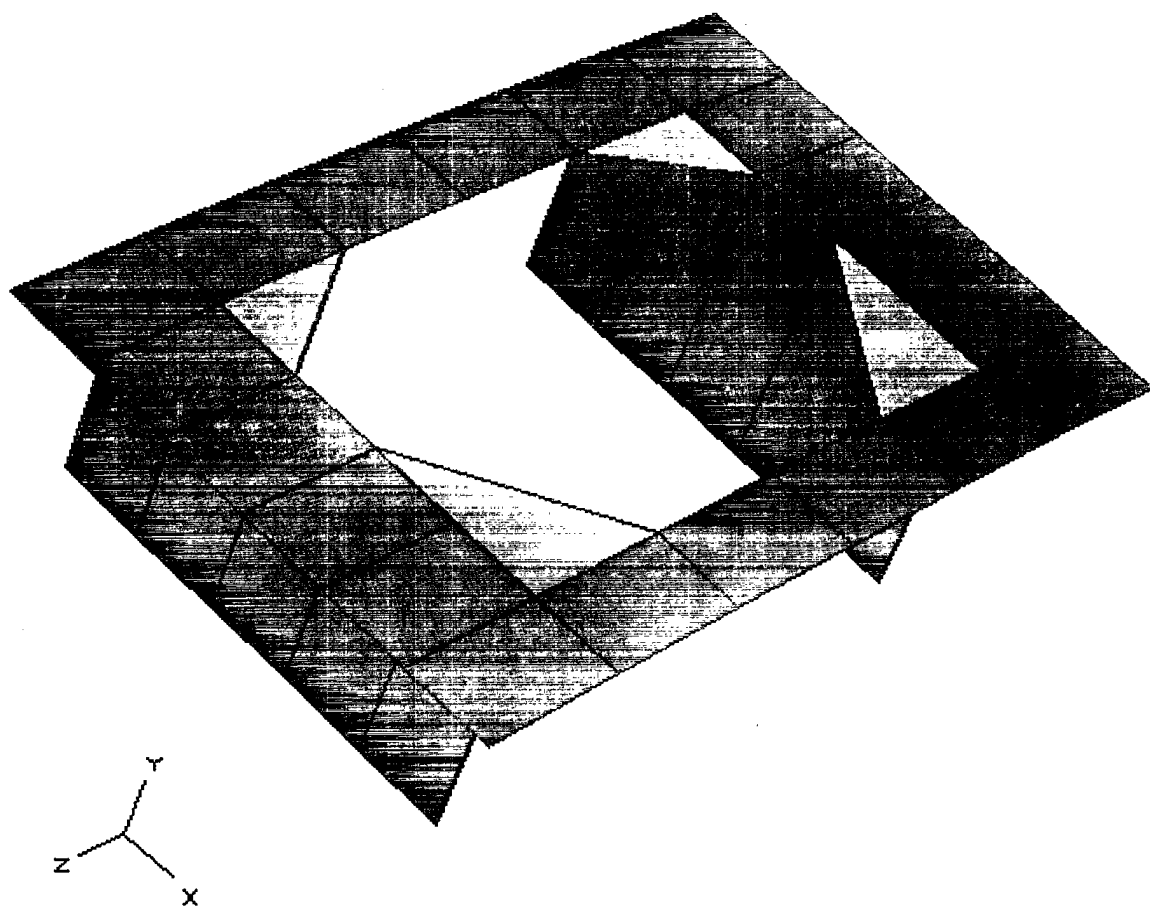


Figure 8: A Model of a Large Deck Opening Extracted from the MAESTRO Model

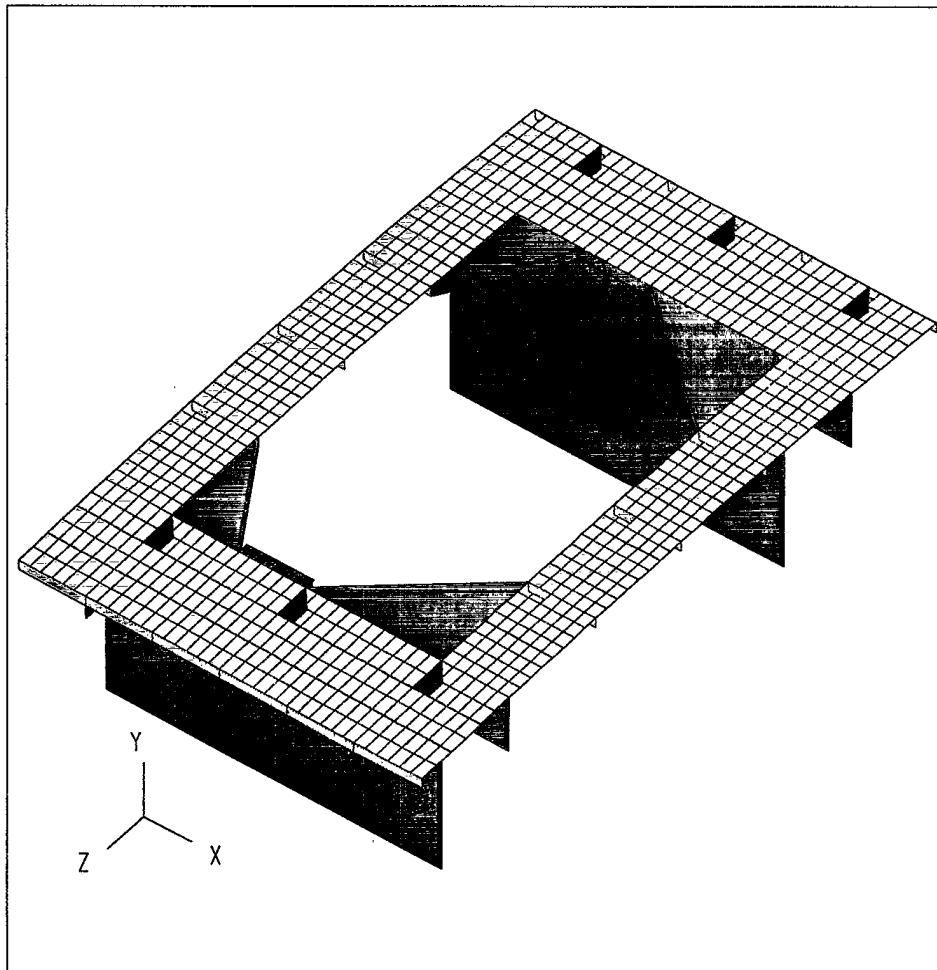


Figure 9: Refinement of the Deck Region of the Large Opening

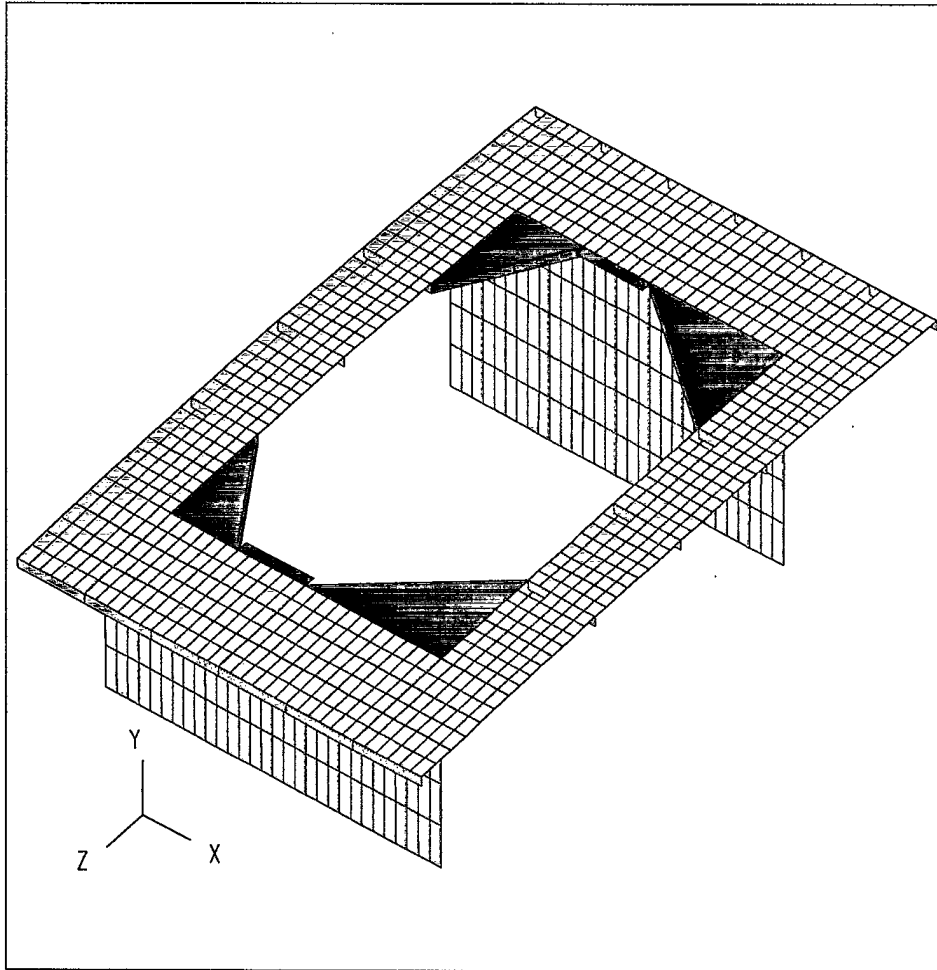


Figure 10: Refinement of the Bulkheads of the Model of the Large Opening

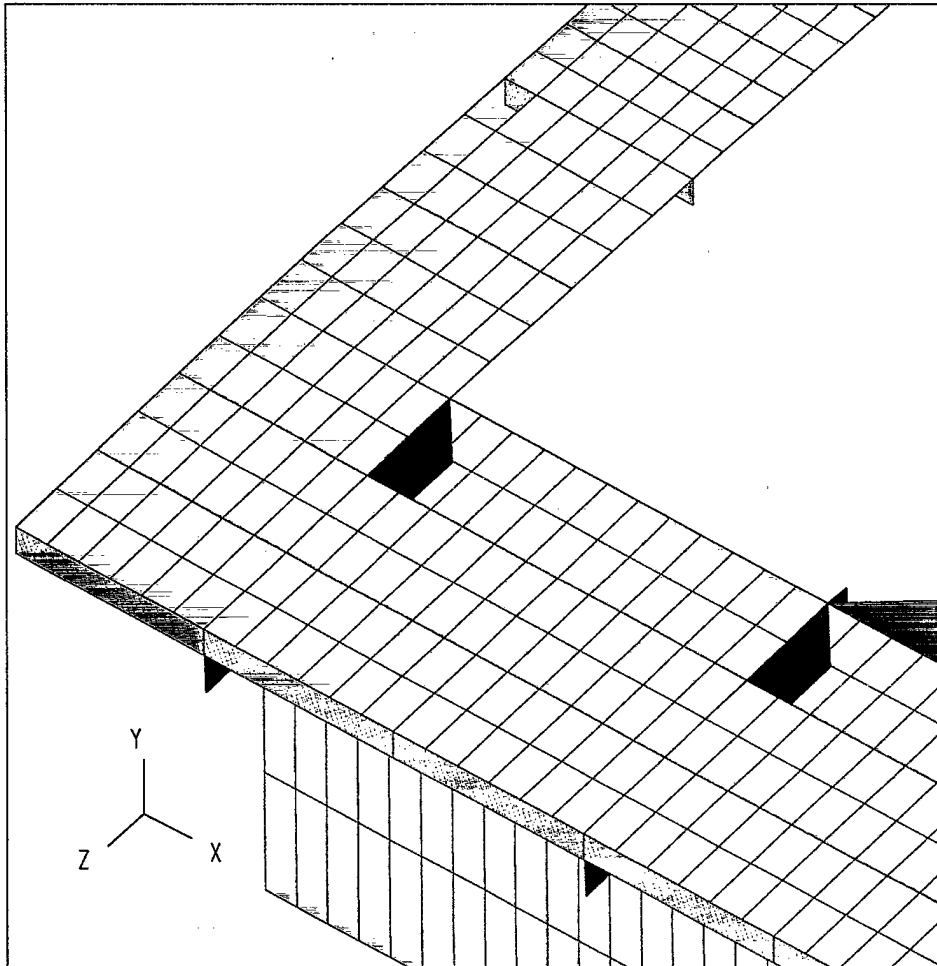


Figure 11: An Enlarged View of the Corner of the Large Opening with the Corner Plate and Beam Removed

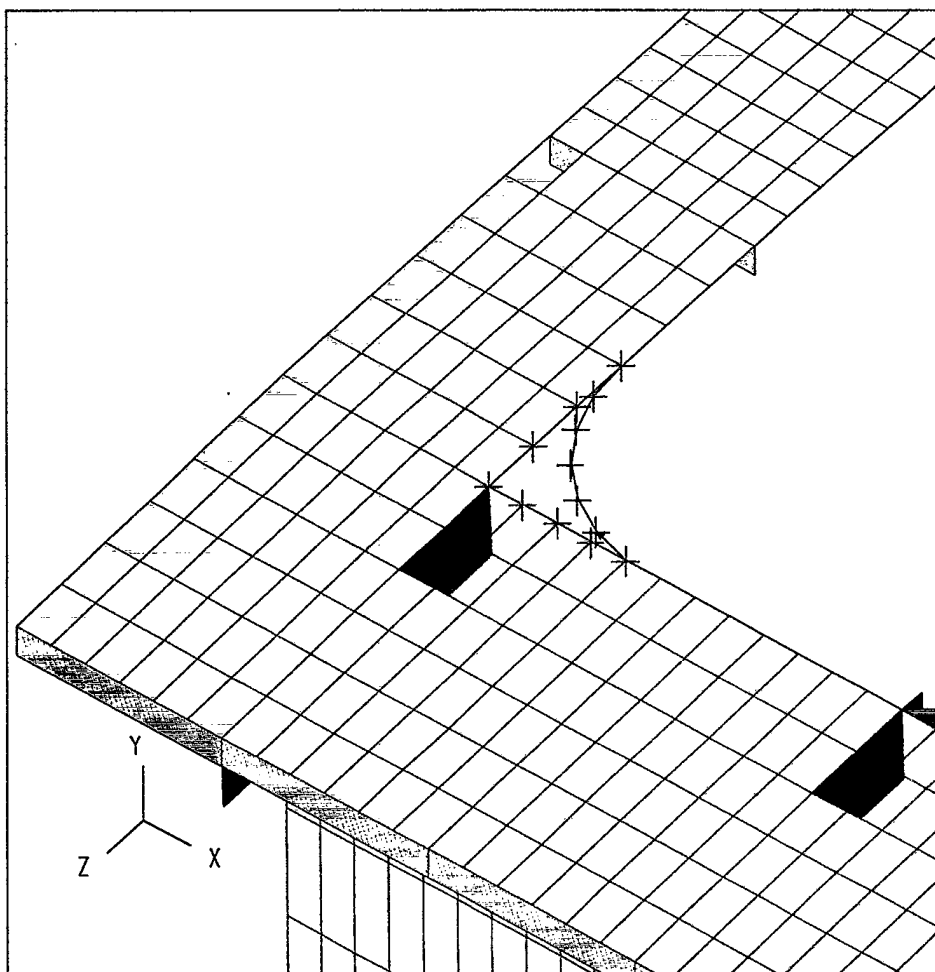


Figure 12: The Chord Option Curve Drawn Through the Chosen Points

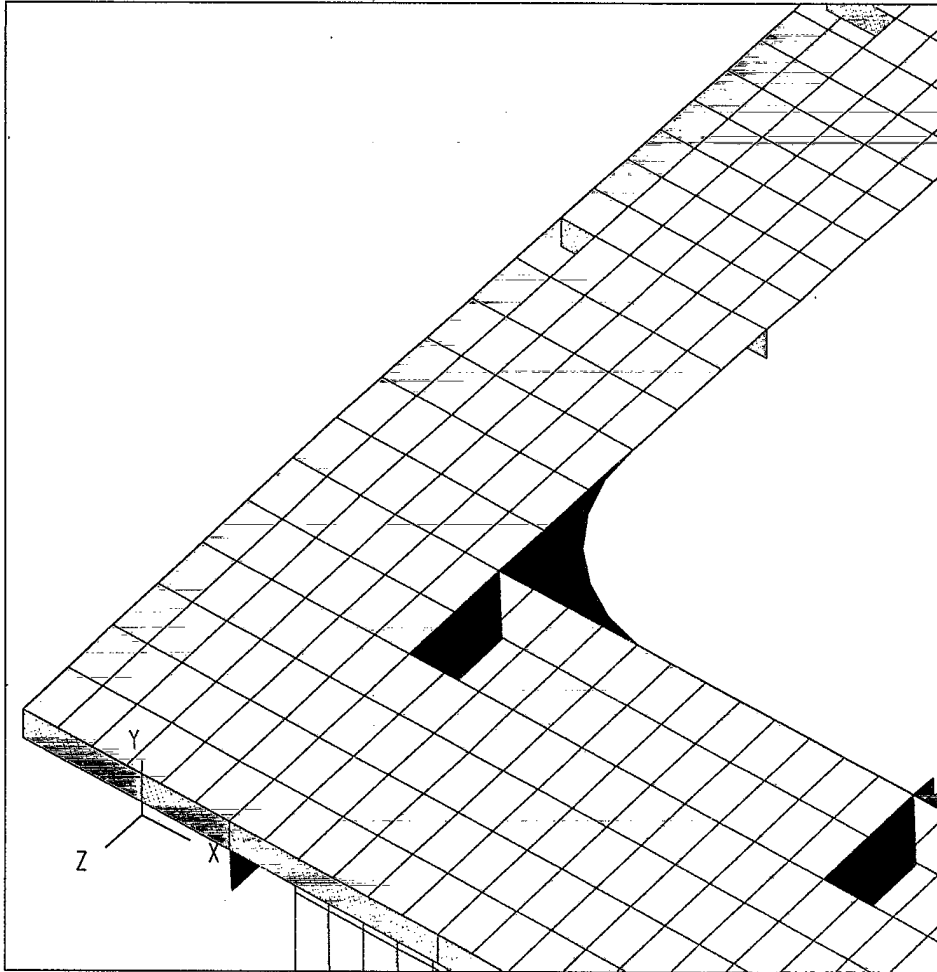


Figure 13: The Meshed Triangle in the Corner of the Large Opening

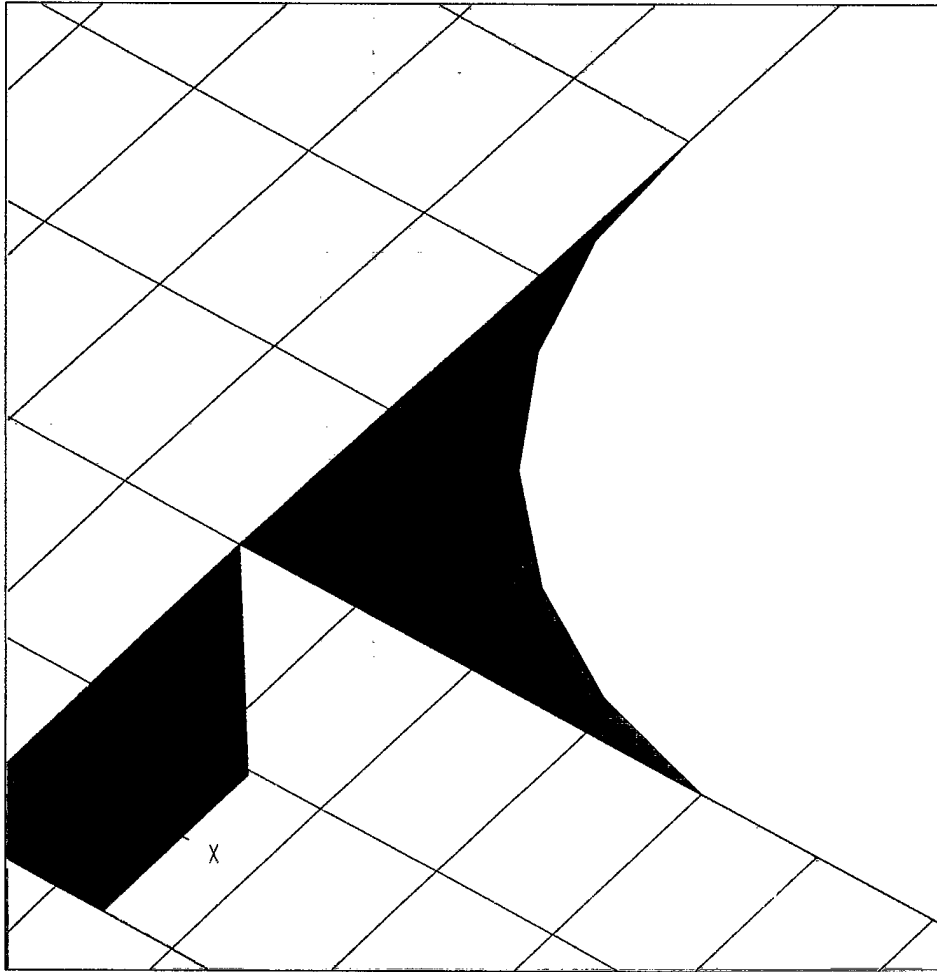


Figure 14: An Enlarged View of the Meshed Triangle

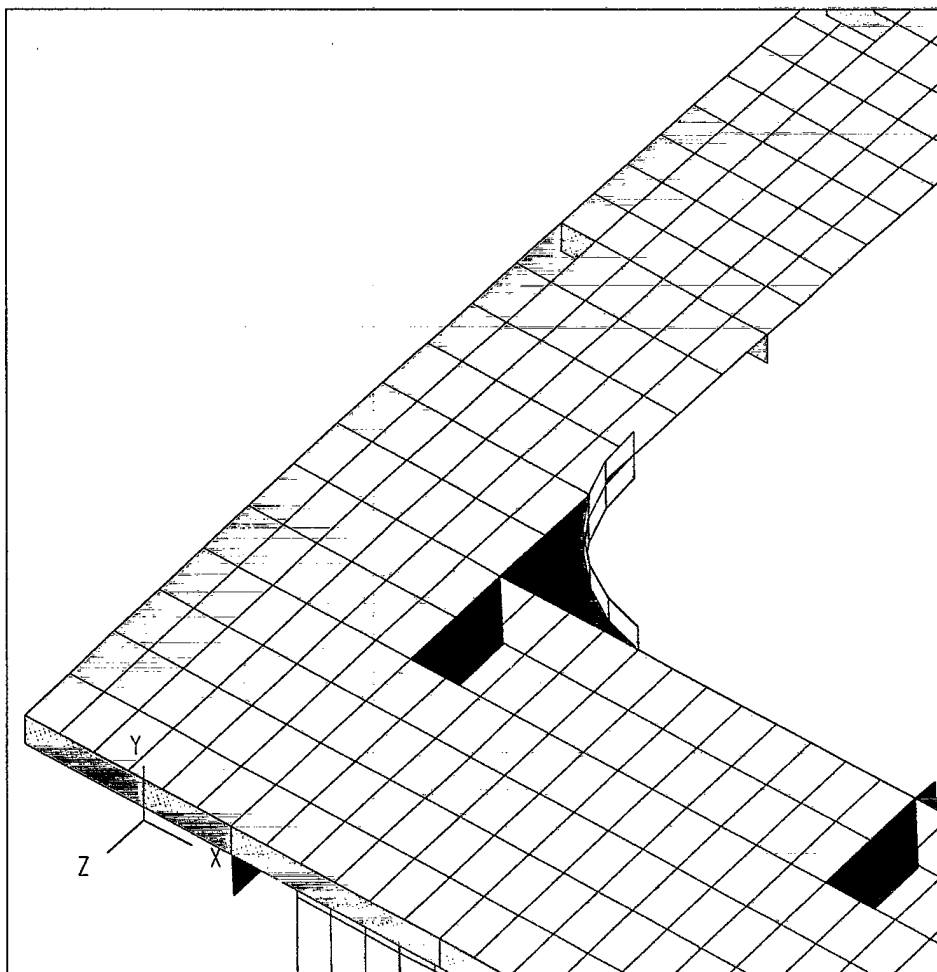


Figure 15: The Curved Collar Attached to the Meshed Triangle

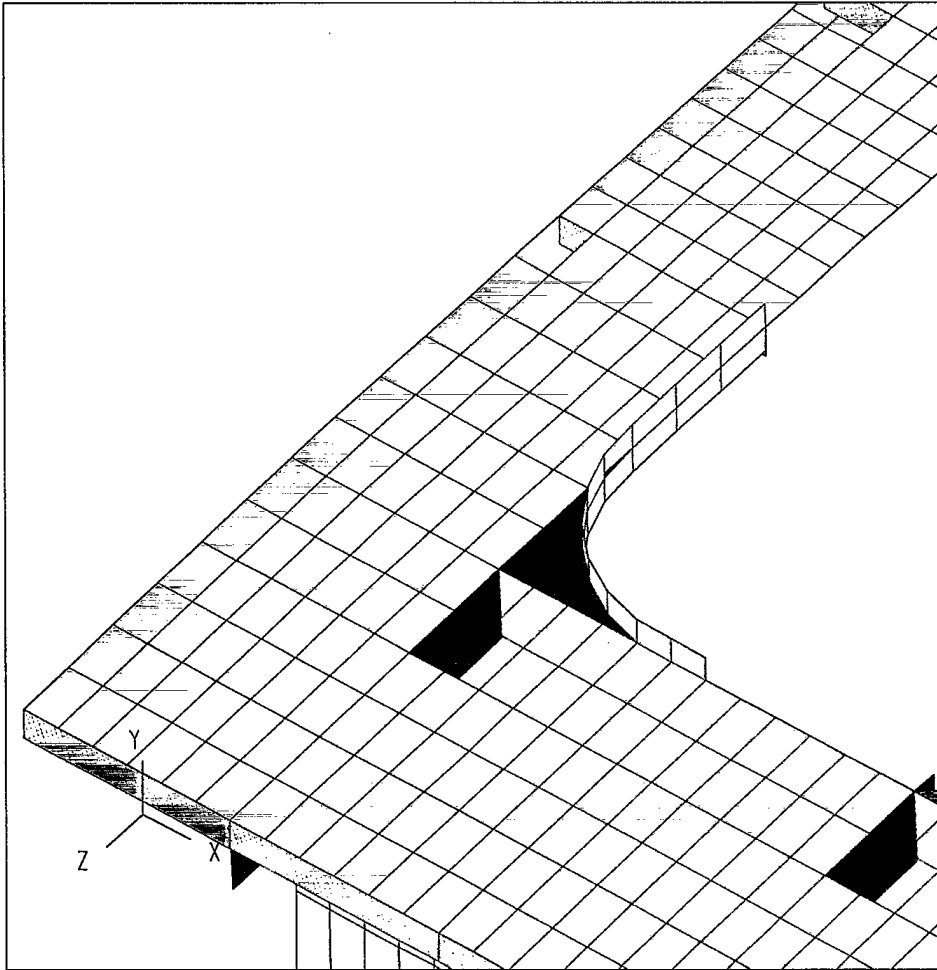


Figure 16: The Curved Collar with Straight Portions Attached

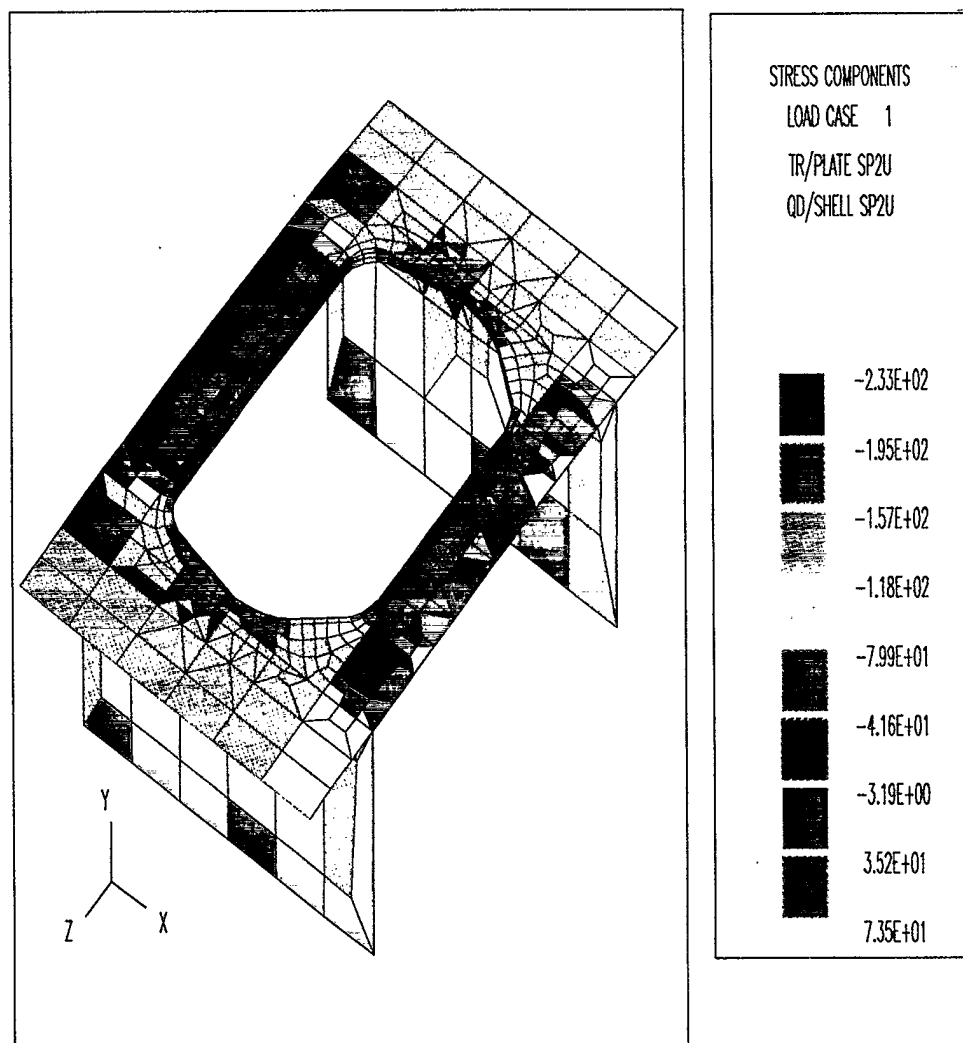


Figure 17: Element Stresses Plotted After Latex Processing without the use of the Special Feature

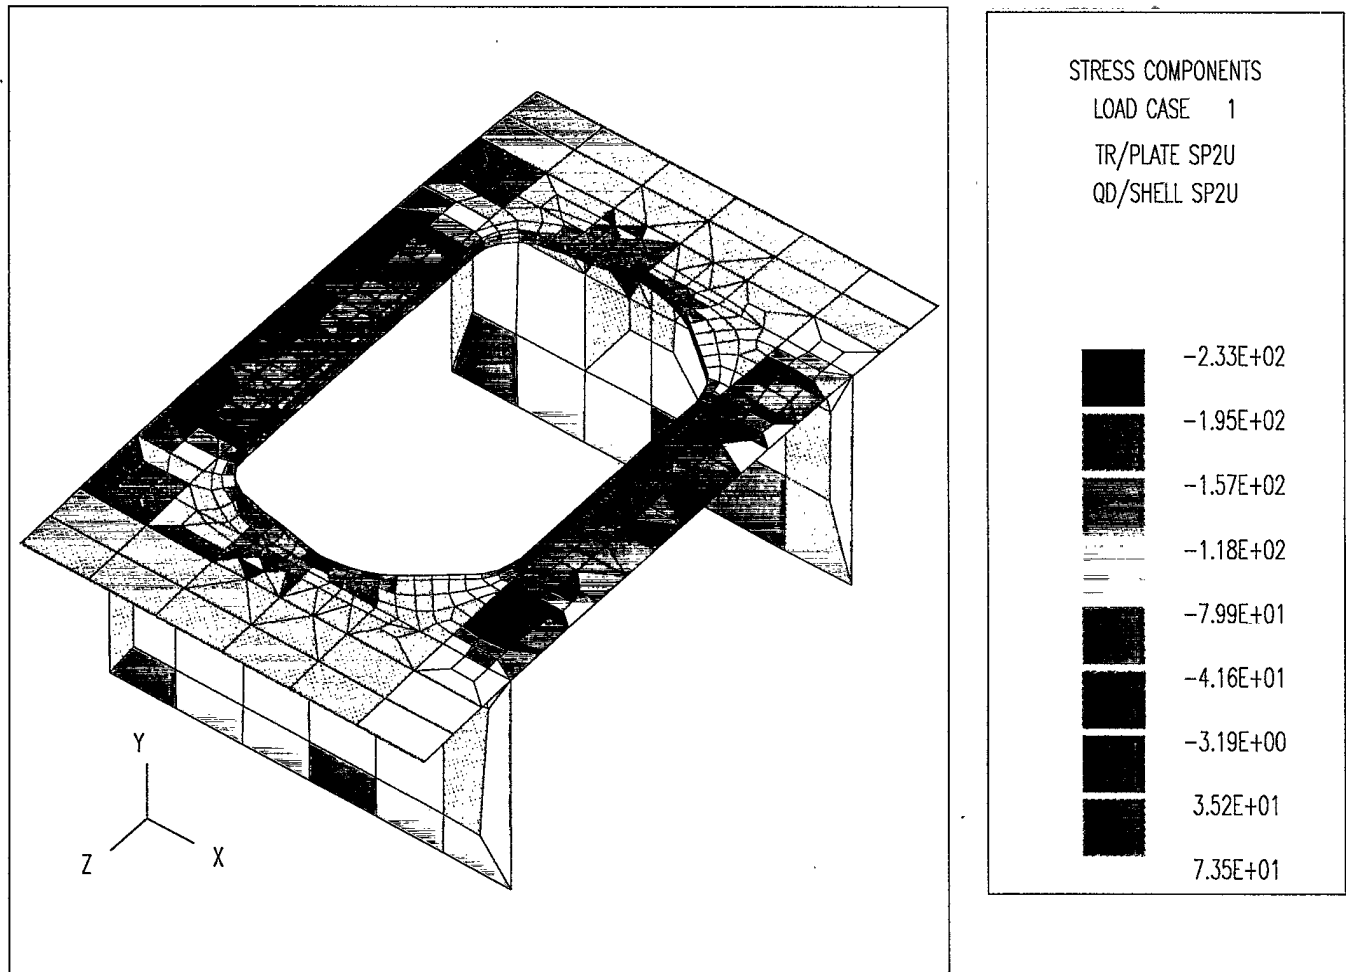


Figure 18: Element Stresses Plotted After Latex Processing with the Use of the Special Feature

References

- [1] "MAESTRO,-Method for Analysis Evaluation and Structural Optimization, User's Manual Version 6.0," distributed by Ross McNatt Naval Architects, Annapolis, MD., July 1992.
- [2] "MAESTRO Graphics," distributed by Proteus Engineering Stevensville, MD.
- [3] "Vibration And Strength Analysis Program(VAST): User's Manual Version 6.0", Martec Ltd., Halifax, Nova Scotia , September, 1990.
- [4] "HyperMesh 2.0 Documentation" Altair Computing Inc., Troy, Michigan.
- [5] Lamport Leslie, "Latex User's Guide and Reference Manual" Addison Wesley Publishing Co., Reading, Mass., April, 1986.
- [6] "Microsoft Windows 95" Microsoft Corporation, Redmond, Washington, 1995.
- [7] "VAST GRAPHICS SYSTEM -VG-" Martec Ltd., Halifax, Nova Scotia, March 1996.
- [8] "Aladdin Ghostscript 3.53," Aladdin Enterprises, Melno Park, CA. Jan 10, 1996.

7 Laptop Specification

The Laptop computer used in the analysis had the following specification

MULTIMEDIA NOTEBOOK Model 85

Central Processor	120 Mhz Pentium
RAM	24 MB
VGA RAM	1 MB
Hard Drive	1.2 GIG
3.5 Floppy Drive	1.44 MB
CD-ROM	4X Speed
PC Card Slots	type II and type III
Ethernet Card	3COM Etherlink III 3C589C LAN PC

SOFTWARE

Windows 95

Ghostscript

Maestro

Maestro/DSA for DOS Version 71

GKS Graphics System

8 DSA File

A typical DSA file for superelement analysis created by MAESTRO/DSA is shown below

```
MAVEVAS 3      don 1      don = file name for the created files
MAESTRO                                     3 = number of letters in prefix
SE      |                                     1 = code for Maestro
SE      | list of MAESTRO      |      1 = superelement
SE      | elements deleted    |      analysis
SE      | where superelements |      2 = only generate
      will fit                  the superelement
      3 = stress recovery
```

A typical DSA file for top-down analysis

```
MAEVAS 4 neil 4 1
MAESTRO
PRESCRIBED DISPLACEMENTS -1 2
LC 1
8.0M WAVE, SAG AND HORIZ CORRECTION
1 -0.53938164E+02 -0.11708205E+03 -0.10004120E+01
  0.13252186E-03 -0.55373755E-04 -0.82660967E-03
4 -0.53743038E+02 -0.11732638E+03 -0.49293923E+00
  0.41686534E-03 0.26068112E-04 -0.81398454E-03
```

7 -0.53374020E+02 -0.11737679E+03 -0.37201625E+00
 0.58673213E-04 0.13978501E-03 -0.80943649E-03
 10 -0.52898952E+02 -0.11749815E+03 -0.36968574E+00
 -0.36042857E-04 0.54389442E-04 0.39366216E-04
 11 -0.54523613E+02 -0.11782254E+03 -0.10801766E+01
 0.49130415E-03 0.39949059E-03 -0.50284766E-03

LC 2

8.0M WAVE, HOG AND HORIZ CORRECTION

1 -0.14490368E+01 0.11860401E+03 0.41130793E+00
 -0.65364706E-03 0.33972072E-04 0.61284652E-03
 4 -0.15585902E+01 0.11971218E+03 -0.77930227E-01
 -0.41333679E-03 -0.27129530E-04 0.70788147E-03
 7 -0.19260654E+01 0.11977243E+03 -0.18246761E+00
 -0.17746368E-03 -0.12925698E-03 0.64403581E-03
 10 -0.23804166E+01 0.11995909E+03 -0.18673787E+00
 -0.16360631E-04 -0.48573776E-04 -0.20149683E-03
 11 -0.91056573E+00 0.11912961E+03 0.48744330E+00
 -0.44808740E-03 -0.36280282E-03 0.27723025E-03
 14 -0.77296960E+00 0.12040355E+03 0.16627207E+00
 -0.79554861E-03 -0.52258442E-03 0.19819010E-03
 17 -0.19581997E+01 0.12054018E+03 -0.23847967E-01
 -0.21438014E-03 0.67287829E-03 0.66593126E-03
 20 -0.24528770E+01 0.12059032E+03 -0.14515410E+00

-0.44545606E-04 -0.51934898E-04 0.11440367E-02

| | |

48 0.19956732E+01 0.12023772E+03 0.55965502E-01

-0.12979197E-03 0.43529345E-03 0.25769553E-03

2 -0.14855574E+01 0.11897343E+03 0.24821611E+00

-0.57353755E-03 0.13603317E-04 0.64452726E-03

3 -0.15220770E+01 0.11934284E+03 0.85128777E-01

-0.49343018E-03 -0.67648757E-05 0.67620713E-03

0 0.00000000E+00 0.00000000E+00 0.00000000E+00

0.00000000E+00 0.00000000E+00 0.00000000E+00

ENDMAEVAS

9 MAESTRO.DAT File

An example of a MAESTRO.DAT file This file is explained line by line and item by item in the MAESTRO Data Preparation Manual. The dollar sign indicates a comment.

"EX1.DAT - EXAMPLE NO. 1; DESTROYER ESCORT HULL"

\$ JOB INFORMATION

ANALYSIS 1 1

\$ STRUCTURE PARAMETERS

2 2 2 3

UNITS Newtons MM "COST UNITS" TONNES

CRITERIA DEFAULT 1.50 1.25

\$ MATERIAL PROPERTIES

MAT 1 210000. 0.3 400. 500. 400. 7.85E-06 7.85E-09

MAT 2 210000. 0.3 250. 400. 250. 7.85E-06 7.85E-09

\$ SUBSTRUCTURE IDENTIFIER

SUBS 1

0.0 0.0 0.0

\$ MODULE IDENTIFIER

MODULE 1

\$ DATA GROUP 1 - GENERAL INFORMATION

2 1 , 17 4 , 4

2500. , , , 999. 0.5

\$ DATA GROUP 2 - END POINTS

0.0 0.
 644. -2500.
 1260. -4700.
 2500. -5500.
 3000. -5500.
 4300. -5500.
 6700. -5500.
 6700. 0.
 6700. -2900.
 4300. 0.
 4300. -2900.

END

\$ DATA GROUP 3 - ADDITIONAL NODES

NODE 1 5000. 2000. -2500.
 NODE 2 5000. 2000. -4200.
 NODE 3 3500. 2000. -2500.
 NODE 4 3500. 2000. -4200.

\$ DATA GROUP 4A - STRAKES

BOTTOM 1 1 2 1 1 2 , LSH
 BOTTOM 2 2 3 1 1 2 , LSH
 SIDE 3 3 4 1 1 2 , LSH
 SIDE 4 4 5 2 2 , , LSH
 SIDE 5 5 6 2 , , , LSH
 SIDE 6 6 7 1 1 , , LSH

DECK	7	8	9	1	1	,	,	LSH	,-T
DECK	8	9	7	1	1	,	,	LSH	,-T
OTHER	9	10	11	2	2	,	,	,	,-T
OTHER	10	11	6	2	,	,	,	,	,-T

END

\$ DATA GROUP 4B - GIRDERS

GIRDER	1	1	1,,0.	1.0
+	2	1	1,,15.	1.0
+	3	2	1,,35.8	1.0
+	5	4	2,,90.	1.0
+	7	7	1,,180.	0.5
+	8	7	1,,180.	0.5
+	9	9	2,,180.	0.5,,1
+	10	9	2,,180.	0.5

END

\$ DATA GROUP 5 SUPERELEMENTS

SUPER 1 "TRANSVERSE BULKHEAD AT SECTION 0"

SECTION 0

\$ Additional Nodes

\$	X	Y	Z
NODE	1001	3000.	-4700.
NODE	1002	2500.	-4700.
NODE	1003	2500.	-2900.
NODE	1004	2500.	0.

END

\$ ELEMENTS COMPRISING SUPERELEMENTS

ELEM	1	2	1	1004	1003	2	9.
ELEM	2	3	2	1003	1002	2	9.
ELEM	3	3	1002	4	,	2	9.
ELEM	4	4	1002	1001	5	2	9.
ELEM	5	5	1001	6	,	2	9.
ELEM	6	1001	11	6	,	2	9.
ELEM	7	1002	1003	1001	,	2	9.
ELEM	8	1001	1003	11	,	2	9.
ELEM	9	1003	1004	10	11	2	9.
ELEM	10	11	10	8	9	2	9.
ELEM	11	6	11	9	7	2	9.

END

ENDSUP

\$GROUP VI(A) - PILLAR

STRUT 2 1.2

TUBE 1 1 10 1 1 6. 125. , 0.5

\$GROUP VI(B) - TRIANGLES

2 2 -1 0 -3 0 2 10.

2 2 -3 0 2 1 2 10.

3 2 -2 0 -4 0 2 10.

3 2 -4 0 3 1 2 10.

\$GROUP VII(A) - ADDL. BEAMS

```

1 0 1004 0 2 HI
1004 0 10 0 2 HI
10 0 8 0 2 HI
11 0 9 0 2 HI
5 0 1001 0 2 HI
6 0 1001 0 2 HI
11 0 1001 0 2 HI
1001 0 1002 0 2 HI
4 0 1002 0 2 HI
1002 0 1003 0 2 HI
1003 0 1004 0 2 HI
3 0 1002 0 2 HI
2 0 1003 0 2 HI
1003 0 11 0 2 HI
10 1 8 1 2 LO
11 2 9 2 2 -T
1 1 2 1 2 T 1 ! SUBSTITUTE FOR STRAKE 1 FRAME UNDER PILLAR
$GROUP VII(B) - ADDL. PANELS
10 1 11 1 9 1 8 1 2 OL , 9 1
11 1 11 2 9 2 9 1 2 OL , 9 2
-3 0 -1 0 -2 0 -4 0 2 OL
2 2 3 2 -2 0 -1 0 2 OL
! GROUP VIII
$GROUP IX - STIFFENED PANEL SCANTLINGS

```

5	0	12.	170.	6.	100.	10.	
5	0	12.	150.	6.	100.	9.	
2	1	12.	150.	6.	100.	9.	
0	1	10.	100.	6.	82.	7.	
1	0	10.	100.	6.	82.	7.	
3	0	12.	110.	6.	90.	8.	
6	0	12.	110.	6.	90.	8.	
5	0	12.	110.	6.	90.	8.	
3	0	8.	100.	6.	82.	7.	0 0 1
3	0	8.	100.	6.	82.	7.	

\$GROUP X - GIRDER SCANTLINGS

500.	6.	200.	20.	0
350.	12.	180.	16.	0
300.	12.	180.	16.	0
250.	12.	180.	16.	0
400.	6.	120.	16.	0
400.	12.	180.	16.	0
400.	6.	120.	16.	0
400.	12.	240.	16.	0

\$GROUP XI - FRAME SCANTLINGS

400.	8.	250.	8.
350.	8.	250.	8.
300.	8.	125.	8.
300.	8.	100.	8.

300. 8. 100. 8.

300. 8. 100. 8.

300. 8. 125. 8.

300. 8. 125. 8.

250. 8. 125. 8.

250. 8. 125. 8.

\$GROUP XII(A) - ADDL. BEAM SCANTLINGS

250. 3. 62.5 6. 10. 300.

250. 3. 62.5 6. 10. 300.

250. 3. 62.5 6. 10. 300.

250. 3. 62.5 6. 10. 300.

250. 3. 62.5 6. 10. 300.

250. 3. 62.5 6. 10. 300.

250. 3. 62.5 6. 10. 300.

250. 3. 62.5 6. 10. 300.

250. 3. 62.5 6. 10. 300.

250. 3. 62.5 6. 10. 300.

250. 3. 62.5 6. 10. 300.

250. 3. 62.5 6. 10. 300.

250. 3. 62.5 6. 10. 300.

250. 3. 62.5 6. 10. 300.

250. 3. 62.5 6. 6. 300.

250. 6. 125. 6. 6. 300.

500. 10. 300. 15. 12. 300. ! SUBSTITUTE FOR STRAKE 1 FRAME UNDER PILLAR

\$GROUP XII(A) - ADDL. PANEL SCANTLINGS

3 6. 100. 6. 50. 12.

3 6. 100. 6. 50. 12.

0 10.

0 10.

\$BRT 1 1 1 1 400. 400. 8. 60. 15.

\$BRT 5 10 6 1 200. 200. 8. 40. 12.

\$BRT 6 8 7 1 200. 200. 8. 40. 12.

END

\$GROUP XV - MODIFICATIONS TO THE STRUCTURAL MODEL

TITLE "OPENING FOR UPTAKE"

GIRDER 9 2

PANEL 9 2

FRAME 9 2

NODE 10 2

END

\$ BOUNDARY CONDITIONS

BOUND 1 1 1 1

RESTRAINT 1 1 1 2 100001

+ 1 1 2 2 100011

+ 1 1 3 2 100011

+ 1 1 4 2 100011

+ 1 1 5 2 100011

+ 1 1 6 2 100011

+	1	1	7	2	110011
+	1	1	8	2	100001
+	1	1	9	2	100011
+	1	1	11	2	100011

END

LOADSET 1 "STATIC LOADS (STEEL, OUTFIT, MACH'Y, SUPERSTRCT. & BOUYANCY)"

Y 1.0 1

IMMERSION 3600.

7 4 0 1.0

\$\$ENGINE AND MACHINERY WEIGHTS

1	1	0.	-8000.
2	1	0.	-16000.
1	2	0.	-4000.
2	2	0.	-8000.

\$\$\$SUPERSTRUCTURE LOAD

9	0	0.	-4600.
9	1	0.	-4600.
9	2	0.	-4600.

PRES	1	.999	
PRES	7	.022	
PRES	8	.022	
PRES	9	.011	1
PRES	10	.011	
PRES	A	.100	1

PRES A .200 2
 PRES A .300 3
 PRES A .400 4
 PRES T .500 1
 PRES T .600 2
 PRES T .700 3
 PRES T .800 4

WEIGHT

3.6 3.6

LOADSET 2 "UNDERWATER EXPLOSION AND STRUCTURAL INERTIA FORCES"

Y 1.0 1

4 0 0 0.4

\$\$Balancing shear force: -0.17 MN, divided into 4 equal parts

4 0 0. -42500.

5 0 0. -42500.

6 0 0. -42500.

7 0 0. -42500.

QUASISTATIC 5000.0 -7800. 0.0 0.3 3.75E-04

QST 1 2 3

END

LOADSET 3 "HOGGING WAVE"

Y 1.0

IMMERSION 3600. , , WAVEONLY 2500. 90000. 20. 0.

0 0 0

LOADSET 4 "SAGGING WAVE"

Y 1.0

IMMERSION 3600. ,, WAVEONLY 2500. 90000. -160. 0.

0 0 0

END

CASE 1 "STATIC LOADS + EXPLOSION + HOGGING WAVE"

1.0 1 2 3

-1.65E+11 0.0 -3.65E+05

CASE 2 "STATIC LOADS + EXPLOSION + SAGGING WAVE"

1.0 1 2 4

1.50E+11 0.0 18.10E+05

ENDLOADS

DESPRESS 0.024 -0.024

STRAKES 7 8

END

PERMANENT 6.

CONCENTRATED 40000. 100. 100.

STRAKES 7 8 9 10

END

UNCLASSIFIED
SECURITY CLASSIFICATION OF FORM
(highest classification of Title, Abstract, Keywords)

DOCUMENT CONTROL DATA		
(Security classification of title, body of abstract and indexing annotation must be entered when the overall document is classified)		
1. ORIGINATOR (the name and address of the organization preparing the document. Organizations for whom the document was prepared, e.g. Establishment sponsoring a contractor's report, or tasking agency, are entered in section 8.) D.R. Smith 20 Kingston Crescent Dartmouth, N.S. 3A 2M1	2. SECURITY CLASSIFICATION (overall security classification of the document including special warning terms if applicable). <p style="text-align: center; font-size: large;">Unclassified</p>	
3. TITLE (the complete document title as indicated on the title page. Its classification should be indicated by the appropriate abbreviation (S,C,R or U) in parentheses after the title). <p style="text-align: center; font-size: large;">Modelling and Refining Structural Detail in a MAESTRO Model for a Bottom-Up or Top-Down Analysis Using the PC Version of MAESTRO/DSA</p>		
4. AUTHORS (Last name, first name, middle initial. If military, show rank, e.g. Doe, Maj. John E.) <p style="text-align: center; font-size: large;">D.R. Smith</p>		
5. DATE OF PUBLICATION (month and year of publication of document) <p style="text-align: center; font-size: large;">October 1997</p>	6a. NO OF PAGES (total containing information include Annexes, Appendices, etc). <p style="text-align: center; font-size: large;">52 (approx.)</p>	6b. NO. OF REFS (total cited in document) <p style="text-align: center; font-size: large;">8</p>
7. DESCRIPTIVE NOTES (the category of the document, e.g. technical report, technical note or memorandum. If appropriate, enter the type of report, e.g. interim, progress, summary, annual or final. Give the inclusive dates when a specific reporting period is covered). <p style="text-align: center; font-size: large;">DREA Contractor Report</p>		
8. SPONSORING ACTIVITY (the name of the department project office or laboratory sponsoring the research and development. Include the address). Defence Research Establishment Atlantic P.O. Box 1012, Dartmouth, N.S. B2Y 3Z7		
9a. PROJECT OR GRANT NO. (if appropriate, the applicable research and development project or grant number under which the document was written. Please specify whether project or grant). <p style="text-align: center; font-size: large;">1gc</p>	9b. CONTRACT NO. (if appropriate, the applicable number under which the document was written). <p style="text-align: center; font-size: large;">W7707-6-3561</p>	
10a. ORIGINATOR'S DOCUMENT NUMBER (the official document number by which the document is identified by the originating activity. This number must be unique to this document). <p style="text-align: center; font-size: large;">DREA CR 98/402</p>	10b. OTHER DOCUMENT NOS. (Any other numbers which may be assigned this document either by the originator or by the sponsor). 	
11. DOCUMENT AVAILABILITY (any limitations on further dissemination of the document, other than those imposed by security classification) <div style="font-size: small;"> <input checked="" type="checkbox"/> (x) Unlimited distribution <input type="checkbox"/> () Distribution limited to defence departments and defence contractors; further distribution only as approved <input type="checkbox"/> () Distribution limited to defence departments and Canadian defence contractors; further distribution only as approved <input type="checkbox"/> () Distribution limited to government departments and agencies; further distribution only as approved <input type="checkbox"/> () Distribution limited to defence departments; further distribution only as approved <input type="checkbox"/> () Other (please specify): </div>		
12. DOCUMENT ANNOUNCEMENT (any limitation to the bibliographic announcement of this document. This will normally correspond to the Document Availability (11). However, where further distribution (beyond the audience specified in 11) is possible, a wider announcement audience may be selected). <p style="text-align: center; font-size: large;">Full unlimited</p>		

UNCLASSIFIED
SECURITY CLASSIFICATION OF FORM

DCD03 2/06/87-M

UNCLASSIFIED
SECURITY CLASSIFICATION OF FORM

13. **ABSTRACT** (a brief and factual summary of the document. It may also appear elsewhere in the body of the document itself. It is highly desirable that the abstract of classified documents be unclassified. Each paragraph of the abstract shall begin with an indication of the security classification of the information in the paragraph (unless the document itself is unclassified) represented as (S), (C), (R), or (U). It is not necessary to include here abstracts in both official languages unless the text is bilingual).

The report describes the process for modelling and refining structural detail of a ship, for which a MAESTRO model has been created, in preparation for a bottom-up or top-down detail stress analysis. The detail can be modelled by either locally refining the MAESTRO model, using the program MAESTRO/DSA, or by creating the model separately with a mesh generator such as HYPERMESH. The processing of the results to display them in graphic form suitable for the documentation program LATEX is also illustrated.

14. **KEYWORDS, DESCRIPTORS or IDENTIFIERS** (technically meaningful terms or short phrases that characterize a document and could be helpful in cataloguing the document. They should be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location may also be included. If possible keywords should be selected from a published thesaurus. e.g. Thesaurus of Engineering and Scientific Terms (TEST) and that thesaurus-identified. If it not possible to select indexing terms which are Unclassified, the classification of each should be indicated as with the title).

finite element
model
MAESTRO
mesh refinement
bottom-up
top-down
detail stress analysis
DSA

UNCLASSIFIED
SECURITY CLASSIFICATION OF FORM



#509064